



Quality Tools for Smart Cleaning

WATER WANDS

Digs deep into tile crevices and uneven floor surfaces to remove liquids, leaving floor finger-dry. Twin moss foam rubber blades. Choose from standard- or heavy-duty squeegee with rugged galvanized steel construction and splash guard. Tapered socket; use with Pro aluminum handles (sold separately). Water Wand Acme Insert (E) (sold separately) will convert water wand from tapered socket to Acme threaded socket.

No.	Size (Inches)	Each
-----	---------------	------

A. Standard Disposable—With black natural foam rubber.

UNG MW550	22	
UNG MW450	18	

B. Heavy-Duty—With black natural foam rubber.

UNG HM750	30	
UNG HM550	22	

C. Heavy-Duty Red Neoprene—With chemical- and oil-resistant rubber.

UNG HW750	30	
-----------	----	--

D. SmartFit Heavy-Duty Water Wand

Innovative, patented, universal socket design accepts industry-standard handles from 19/16-in. to 1 1/8-in. dia. Easy-flush-and-rinse design reduces harmful bacteria buildup. Extra-strong frame outlasts other floor squeegees. Custom color-coding chip system by zone reduces cross-contamination. Twin foam rubber blades.

No.	Size (Inches)	Each
-----	---------------	------

UNG HM22A	22	
UNG HM30A	30	

E. Water Wand Acme Insert

Easily converts Water Wand Series Floor Squeegees (sold separately) from tapered sockets to Acme-compatible sockets for use with tapered or threaded handles. Strong, polymer blend plastic.

UNG FWAI	Each
----------	------

ALUMINUM HANDLES

For Unger® floor squeegees and water wands (sold separately). All styles feature 1-in. diameter anodized aluminum lightweight handle with fluted finish for strength. Ergonomic grip for a comfortable hold. Convenient hang-up hole.

F. Pro Aluminum Knock Down Handle 1.5-Degree

Rigid, fluted aluminum pole ships in three pieces for compact and cheaper shipping. Ergonomic grip nylon handle. 56-in. long when assembled, 20-in. knocked-down. 1.5-degree taper.

UNG AL14G	Each
-----------	------

G. Pro Aluminum 1.5-Degree


56-in. long. 1.5-degree taper.

UNG AL140	Each
-----------	------


H. Pro Aluminum Acme

58-in. long. Zinc Alloy Acme thread. Not for water wands.

UNG AL14A	Each
-----------	------

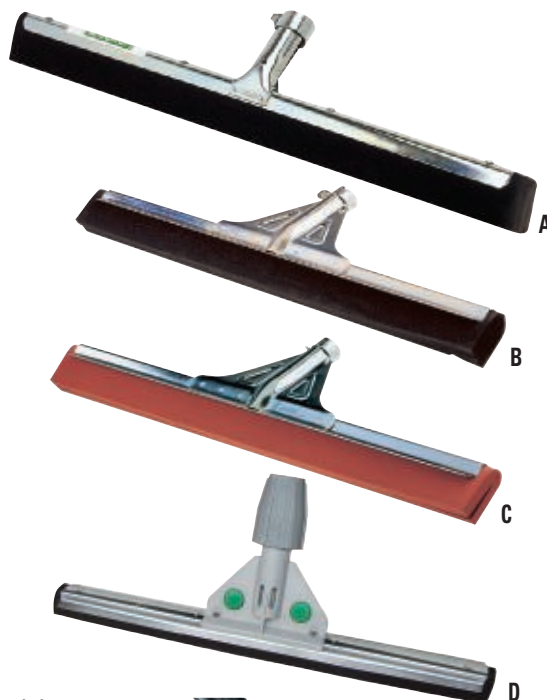

Plastic insert converts tapered socket Water Wands for acceptance of either tapered or standard Acme threaded sockets.

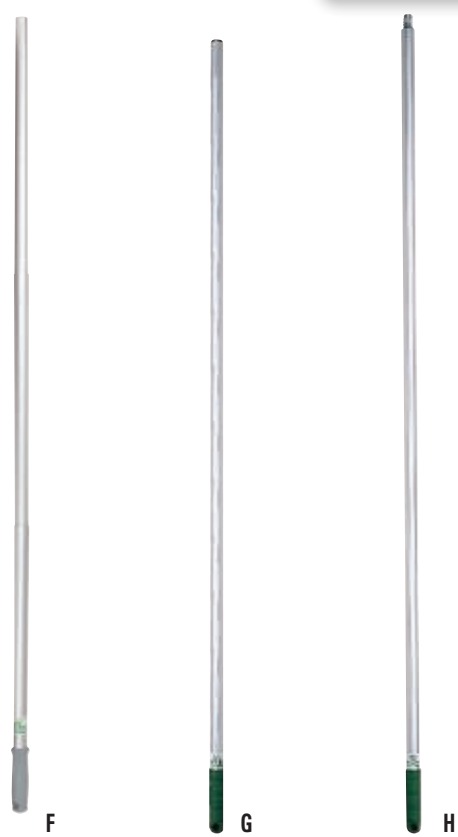

FLOOR SQUEEGEES & WASHERS

Prices are subject to change.